


Weld Neck

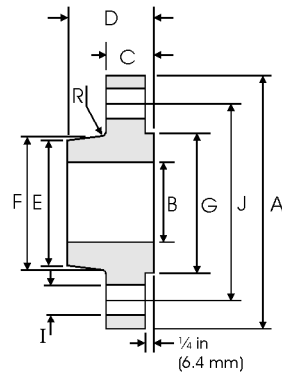

Slip On

## Class 400 lb

Nominal Pipe Size	Flange Data				Hub Data			Raised Face	Drilling Data			Radius	Weight
	A	B	C	D	E	F	G	H	I	J	R		
	Overall Diameter	Slip on Inside Diameter	Flange Thickness	WNF / Slip on Overall Length	WNF Diam. at Weld Bevel	Slip on Hub Diam. at Small End	Hub Diameter	Face Diameter	Number of Holes	Bolt Hole Diam.	Diameter of Circle of Holes	Fillet	kg/ piece
in mm	in mm	in mm	in mm	in mm	in mm	in mm	in mm	in mm		in mm	in mm	in mm	WNF Slip On
26	38 <sup>1</sup> / <sub>4</sub> 971.5	26 <sup>1</sup> / <sub>4</sub> 666.7	3 <sup>1</sup> / <sub>2</sub> 88.9	7 <sup>5</sup> / <sub>8</sub> 193.7	26 <sup>5</sup> / <sub>16</sub> 668.3	27 <sup>5</sup> / <sub>16</sub> 693.7	28 <sup>5</sup> / <sub>8</sub> 727.1	29 <sup>1</sup> / <sub>2</sub> 749.3	28	1 <sup>7</sup> / <sub>8</sub> 47.6	34 <sup>1</sup> / <sub>2</sub> 876.3	<sup>7</sup> / <sub>16</sub> 11.11	340 295
28	40 <sup>3</sup> / <sub>4</sub> 1035.0	28 <sup>1</sup> / <sub>4</sub> 717.6	3 <sup>3</sup> / <sub>4</sub> 95.2	8 <sup>1</sup> / <sub>8</sub> 206.4	28 <sup>5</sup> / <sub>16</sub> 719.1	29 <sup>3</sup> / <sub>8</sub> 746.1	30 <sup>13</sup> / <sub>16</sub> 782.6	31 <sup>1</sup> / <sub>2</sub> 800.1	28	2 50.8	37 939.8	<sup>1</sup> / <sub>2</sub> 12.7	399 354
30	43 1092.2	30 <sup>1</sup> / <sub>4</sub> 768.3	4 101.6	8 <sup>5</sup> / <sub>8</sub> 219.1	30 <sup>5</sup> / <sub>16</sub> 769.6	31 <sup>1</sup> / <sub>2</sub> 800.1	32 <sup>15</sup> / <sub>16</sub> 836.6	33 <sup>3</sup> / <sub>4</sub> 857.2	28	2 <sup>1</sup> / <sub>8</sub> 54.0	39 <sup>1</sup> / <sub>4</sub> 996.9	<sup>1</sup> / <sub>2</sub> 12.7	454 408
32	45 <sup>1</sup> / <sub>4</sub> 1149.3	32 <sup>1</sup> / <sub>4</sub> 819.1	4 <sup>1</sup> / <sub>4</sub> 107.9	9 <sup>1</sup> / <sub>8</sub> 231.8	32 <sup>3</sup> / <sub>8</sub> 822.3	33 <sup>9</sup> / <sub>16</sub> 852.5	35 889.0	36 914.4	28	2 <sup>1</sup> / <sub>8</sub> 54.0	41 <sup>1</sup> / <sub>2</sub> 1054.1	<sup>1</sup> / <sub>2</sub> 12.7	522 465
34	47 <sup>1</sup> / <sub>2</sub> 1206.5	34 <sup>1</sup> / <sub>4</sub> 869.9	4 <sup>3</sup> / <sub>8</sub> 111.1	9 <sup>1</sup> / <sub>2</sub> 241.3	34 <sup>3</sup> / <sub>8</sub> 873.1	35 <sup>5</sup> / <sub>8</sub> 904.9	37 <sup>3</sup> / <sub>16</sub> 944.6	38 965.2	28	2 <sup>1</sup> / <sub>8</sub> 54.0	43 <sup>1</sup> / <sub>2</sub> 1104.9	<sup>9</sup> / <sub>16</sub> 14.29	590 522
36	50 1270.0	36 <sup>1</sup> / <sub>4</sub> 920.8	4 <sup>1</sup> / <sub>2</sub> 114.3	9 <sup>7</sup> / <sub>8</sub> 250.8	36 <sup>7</sup> / <sub>16</sub> 925.5	37 <sup>3</sup> / <sub>4</sub> 958.8	39 <sup>7</sup> / <sub>8</sub> 1012.9	40 <sup>1</sup> / <sub>4</sub> 1022.3	32	2 <sup>1</sup> / <sub>8</sub> 54.0	46 1168.4	<sup>9</sup> / <sub>16</sub> 14.29	669 601

### Notes

- For weld neck flanges, dimension B is to be specified by the purchaser. It corresponds to the pipe inside diameter.
- For slip on flanges, the hub may be cylindrical or have a draft of  $\leq 7^\circ$  on the outside surface.
- WNF = Weld Neck Flange.
- Weights are based on manufacturer's data and are approximate.