


Weld Neck

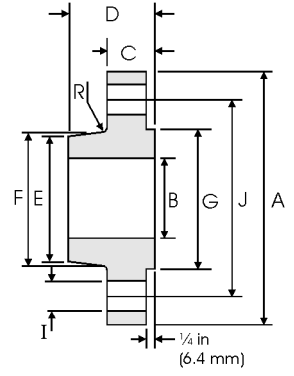

Slip On

**Class 600 lb**

Pipe	Flange Data				Hub Data			Raised Face	Drilling Data			Radius	Weight
Nominal Pipe Size	A	B	C	D	E		F	G	H	I	J	R	
	Overall Diameter	Slip on Inside Diameter	Flange Thickness	WNF / Slip on Overall Length	WNF Diam. at Weld Bevel	Slip on Hub Diam. at Small Lend	Hub Diameter	Face Diameter	Number of Holes	Bolt Hole Diam.	Diameter of Circle of Holes	Fillet	kg/ piece
	in mm	in mm	in mm	in mm	in mm	in mm	in mm	in mm		in mm	in mm	in mm	in mm
26	40 1016.0	26 <sup>1</sup> / <sub>4</sub> 666.7	4 <sup>1</sup> / <sub>4</sub> 107.9	8 <sup>3</sup> / <sub>4</sub> 222.2	26 <sup>7</sup> / <sub>16</sub> 671.52	27 <sup>13</sup> / <sub>16</sub> 706.4	29 <sup>7</sup> / <sub>16</sub> 747.7	29 <sup>1</sup> / <sub>2</sub> 749.3	28	2 50.8	36 914.4	9 <sup>9</sup> / <sub>16</sub> 14.29	437 408
28	42 <sup>1</sup> / <sub>4</sub> 1073.1	28 <sup>1</sup> / <sub>4</sub> 717.6	4 <sup>3</sup> / <sub>8</sub> 111.1	9 <sup>1</sup> / <sub>4</sub> 234.9	28 <sup>1</sup> / <sub>2</sub> 723.9	29 <sup>15</sup> / <sub>16</sub> 760.4	31 <sup>5</sup> / <sub>8</sub> 803.3	31 <sup>1</sup> / <sub>2</sub> 800.1	28	2 <sup>1</sup> / <sub>8</sub> 54.0	38 965.2	5 <sup>5</sup> / <sub>8</sub> 15.88	508 472
30	44 <sup>1</sup> / <sub>2</sub> 1130.3	30 <sup>1</sup> / <sub>4</sub> 768.3	4 <sup>1</sup> / <sub>2</sub> 114.3	9 <sup>3</sup> / <sub>4</sub> 247.6	30 <sup>1</sup> / <sub>2</sub> 774.7	32 <sup>1</sup> / <sub>16</sub> 814.4	33 <sup>15</sup> / <sub>16</sub> 862.0	33 <sup>3</sup> / <sub>4</sub> 857.2	28	2 <sup>1</sup> / <sub>8</sub> 54.0	40 <sup>1</sup> / <sub>4</sub> 1022.3	1 <sup>11</sup> / <sub>16</sub> 17.46	559 526
32	47 1193.8	32 <sup>1</sup> / <sub>4</sub> 819.1	4 <sup>5</sup> / <sub>8</sub> 117.5	10 <sup>1</sup> / <sub>4</sub> 260.3	32 <sup>1</sup> / <sub>2</sub> 825.5	34 <sup>3</sup> / <sub>16</sub> 868.4	36 <sup>1</sup> / <sub>8</sub> 917.6	36 914.4	28	2 <sup>3</sup> / <sub>8</sub> 60.3	42 <sup>1</sup> / <sub>2</sub> 1079.5	1 <sup>11</sup> / <sub>16</sub> 17.46	680 605
34	49 1244.6	34 <sup>1</sup> / <sub>4</sub> 869.9	4 <sup>3</sup> / <sub>4</sub> 120.6	10 <sup>5</sup> / <sub>8</sub> 269.9	34 <sup>9</sup> / <sub>16</sub> 877.9	36 <sup>5</sup> / <sub>16</sub> 922.3	38 <sup>5</sup> / <sub>16</sub> 973.1	38 965.2	28	2 <sup>3</sup> / <sub>8</sub> 60.3	44 <sup>1</sup> / <sub>2</sub> 1130.3	3 <sup>3</sup> / <sub>4</sub> 19.05	717 652
36	51 <sup>3</sup> / <sub>4</sub> 1314.4	36 <sup>1</sup> / <sub>4</sub> 920.7	4 <sup>7</sup> / <sub>8</sub> 123.8	11 <sup>1</sup> / <sub>8</sub> 282.6	36 <sup>9</sup> / <sub>16</sub> 928.7	38 <sup>7</sup> / <sub>16</sub> 976.3	40 <sup>5</sup> / <sub>8</sub> 1031.9	40 <sup>1</sup> / <sub>4</sub> 1022.3	28	2 <sup>5</sup> / <sub>8</sub> 66.7	47 1193.8	3 <sup>3</sup> / <sub>4</sub> 19.05	780 744

Notes

- For weld neck flanges, dimension B is to be specified by the purchaser. It corresponds to the pipe inside diameter.
- For slip on flanges, the hub may be cylindrical or have a draft of ≤ 7° on the outside surface.
- WNF = Weld Neck Flange.
- Weights are based on manufacturer's data and are approximate.